




Titan Highland Extreme Package: Telescoping Flagpole

Securi-Shur Anti-Theft Sleeve Locking Clamp Instructions

AtlanticFlagPole.com – 518.400.0765 –
info@atlanticflagpole.com

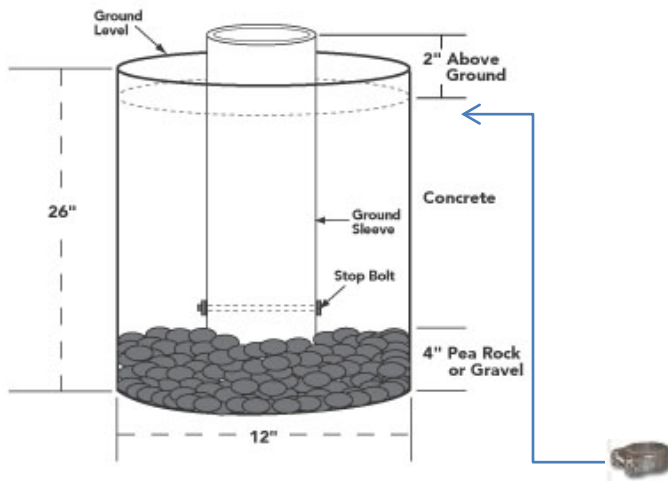

Note: We recommend placing the Securi-Shur anti-theft locking clamp approximately 1.5 inches below grade. This will require the concrete level to be adjusted accordingly during installation of the ground sleeve. This allows the device to be hidden when back-filled by stone, earth, wood chips, or mulch. Then, Place the optional flash collar over the locking clamp and ground sleeve.

- 1) Remove Telescoping flagpole from the ground sleeve
- 2) Place clamp over top of the installed ground sleeve (clamp must make full contact with sleeve)
- 3) Re-install flagpole fully in the ground sleeve
- 4) Use correct size wrench or socket to tighten down locknut on clamp (do not over-tighten)

